


# Outdoor Fireplace Kits




CONTRACTOR

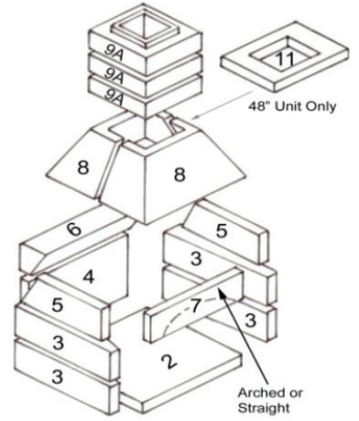

3 Chimney Extensions

STANDARD

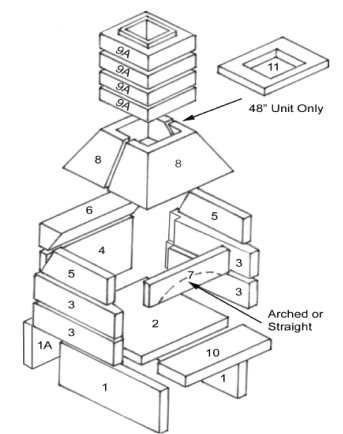

4 Chimney Extensions, Hearth • Risers 18"H • Firebrick

| Size/Style     | Buckets for Assembly | Buckets for Veneer | Sq. feet of Veneer | LF of Veneer Corners Needed | Firebrick Splits Required |
|----------------|----------------------|--------------------|--------------------|-----------------------------|---------------------------|
| 36" Contractor | 4                    | 4                  | 85                 | 26                          | 85                        |
| 36" Standard   | 4                    | 5                  | 100                | 32                          | 85                        |
| 48" Contractor | 5                    | 5                  | 109                | 26                          | 105                       |
| 48" Standard   | 5                    | 6                  | 125                | 32                          | 105                       |
| 36" Wood Box   | -                    | -                  | 11                 | 2                           | -                         |

**SET TIME:**  
For proper curing, please wait a minimum of 28 days before lighting any fire in pizza ovens, fireplaces, and fire pits.

**ARCHED LINTEL:**  
All Contractor and Standard fireplaces come standard with an ARCHED lintel.

**NOTE:** All finishing specifications are approximate, and do not include waste.

## DON'T FORGET...

**NOTE:** Concrete footing recommended - check local codes for details. High temp. mortar needed.

36" Wood Storage Box



Firebrick Splits



Coping

High Temp. All-Purpose Mortar

