

Beacon Hill Flagstone™

Beacon Hill Flagstone has a very natural appearance and is ideal for almost any landscape project you can imagine. Its soft blended colors and subtle surface design gives Beacon Hill Flagstone that relaxed historic look and feel. Available in three sizes for a random appearance.



Colors



Almond Grove



Bavarian
New for 2016



Coffee Creek



New York Blend



Sierra



Steel Mountain
New for 2016



Tuscany

Shapes & Sizes



Large Rectangle
54 cm x 36 cm x 6 cm
21.25" x 14" x 2.25"



Square
36 cm x 36 cm x 6 cm
14" x 14" x 2.25"




Small Rectangle
36 cm x 18 cm x 6 cm
14" x 7" x 2.25"

Design Combinations

The finishing touches to your project lies in the exceptional borders and accents that you incorporate into your landscape features. Looking for more options the pictures featured on the right? Create your own design combinations by clicking the button below!

Create Your Own

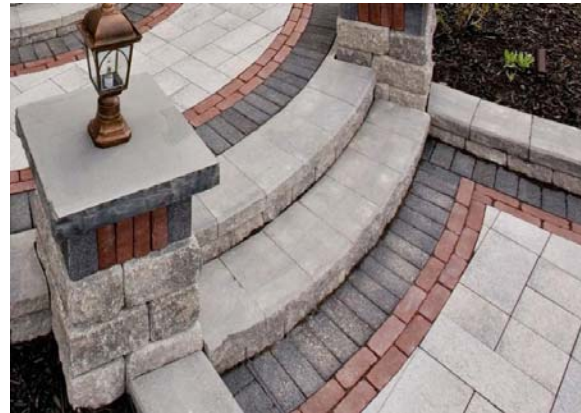

Features

Technologies

EnduraColor™

Two high performance layers are compressed and cured together to provide the highest quality of strength, durability, and everlasting color.

Applications


Pedestrian

Patterns



Beacon Hill A

Random Bundle (100%)



Beacon Hill B

Random Bundle (100%)

Packaging

	Unit Thickness	Sq. Ft. Bndl.	Sq. Ft. Layer	Layers Bndl.	Units Sq. Ft.	Lbs Bndl.	Lbs Sec.	Units Bndl.
Random Bundle	-	93.62	10.40	9	-	2541	282	72
Large Rectangle	6	-	-	-	0.48	-	-	18
Square	6	-	-	-	0.72	-	-	27
Small Rectangle	6	-	-	-	1.43	-	-	27

Additional Beacon Hill Flagstone™ Information

Sold in full bundles only on a refundable skid. Product is not intended for vehicular applications. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. All measurements are nominal.

Important Information

The large unit sizes and the pleasant colors of Beacon Hill make it a fabulous patio or pool deck paver. The subtle flagstone impression provides for a striking visual day or night.

Base Requirement & Bedding Course – standard paver base specification.

Handling and Installation– A protective pad is required when doing the final paver compaction. Both herringbone, random and linear patterns are common.

Jointing Material and Joint Stabilization

- Good: ordinary dry joint sand
 - Best: Any Polymeric Sand or ordinary dry joint sand stabilized by a water-based or solvent-based joint sand stabilizer sealer. (Joints should be flooded but the paver surface must be squeegeed and/or blown clean).
 - Special Note: Gator Maxx Polymeric Sand (overlays)

Sealers

- Product may be sealed but it is not absolutely required.
- Unilock Unicare® Surebond, BP Pro and Techniseal® sealers can be used.
- Select type for desired aesthetics.
- Product must be cleaned before sealing.

Cleaners – Any paver cleaner may be used for color restoration or general cleaning. Follow manufacturer's dilution rates and application procedures.

Special note - To avoid issues with height variance, do not use as a direct overlay on concrete.

i All measurements are nominal

Colors, product data, and availability are subject to change without notice. Please confirm all details with your local Unilock Dealer or call 1-800-UNILOCK (1-800-864-5625) for availability in your area. The colors shown should only be used as a guide. Final color selections should always be made from actual samples.