

Porcelain Paver ACCESSORIES

1

Ardex X90 Outdoor Thin To Medium Setting Bed up to 5/8"

Creamy, easy to apply consistency, just add water. Pot Life 60 minutes up to 95 sqft coverage.



- Highest levels of freeze thaw resistance - Tested at 150+ freeze thaw cycles; (7 times greater than the ANSI 118.15 standard requirement of 20 cycles)
- Maximum efflorescence resistance
- Outstanding rapid-setting properties, even at temperatures as low as 40°F/5°C
- Heavy and driving rain-resistant after only 2 hours

2

Ardex SX Silicone Sealant

For tile & stone applications.



- Quick curing
- Will not sag or slump
- Non-staining; non-yellowing
- Outstanding adhesion
- Permanently flexible
- UV resistant
- Mold and mildew resistant
- Easy to tool and smooth
- Interior or exterior installations
- Can be used in swimming pools and other wet area applications
- Available in clear and in 35 colors to match the ARDEX Grouts

Colors Stocked at Stonewood Products:

- Ocean Grey, Stone Beach, Silver Shimmer

3

Ardex FH Grout



- Mix with water only
- Very easy to apply and clean
- Interior and exterior floor and wall applications
- Weather resistant
- Unaffected by water
- Available in 30 ARDEX colors

Colors Stocked at Stonewood Products:

- Ocean Grey, Stone Beach, Silver Shimmer

Hard Material Continuous Diamond Blades

Designed to provide fast cutting with minimal spalling.



- Standard and Premium options available
- Fast cutting with minimal spalling
- Available in 5 different blade styles

Polysand Sand For Joints up to 1"

Coverage approx. 125sqft



- Can be used for joints up to a maximum of 1 inch (2.5 cm) and its fine gradation allows use in even the tightest joints
- Helps prevent weeds and damage caused by burrowing insects
- Helps prevent erosion due to wind, rain, and freeze thaw cycles
- Fast setting: Product sets within one hour after application of water
- Sets at above freezing temperatures (32°F/ 0°C)
- Can be applied even if rain is expected (however, minimum of 1 hour of dry weather is needed after activation)
- Intact pallets can be stored outside

Gator Base


Equivalent to 6" of crushed stone, saves time and labor. No equipment needed.



- Equivalent to 288 lbs (130 kg) of crushed stone
- Replaces 6 in (15 cm) of compacted crushed stone
- Evacuates water through the channel
- Manufactured using lightweight high-density polypropylene
- Environment-friendly and 100% recyclable
- Extremely durable, will not degrade in the ground
- Designed with LOCK-N-GO tongue and groove system
- Gator Base Insulation has an R-Value of 3.6 (per inch thickness)
- Will significantly reduce the number of freeze and thaw cycles

Gator Spacers

Provides uniform spacing and unparalleled horizontal and vertical stability to the system.
Available in joint sizes of 1/8", 3/16" and 1/4"

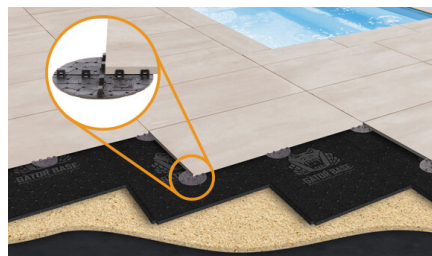

- Provide's the perfect joint width between tiles.
- Spacer can be cut into either a half- or a quarter-unit using an utility knife to be used along the edge of a building or the Gator Tile Edge.