




BLU 80 mm

DESCRIPTION: Paver **TEXTURE:** Smooth and HD² Smooth

PALLET OVERVIEW



NOTES

See page 44 to 47 for more technical information. When used in a permeable pavement application, see page 89 to 95 for more technical information.

JOINT WIDTH: 9/32" (7 mm)
% OF SURFACE OPENING: 3.0 %
INFILTRATION RATE: 570 IN./HR
 (14 475 MM/HR)


Specifications per pallet	Imperial	Metric
Cubing	84.96 ft²	7.90 m ²
Approx. Weight Smooth	3 095 lbs	1 404 kg
Approx. Weight Smooth HD ²	3 101 lbs	1 407 kg
Number of rows	8	
Coverage per row	10.62 ft ²	0.99 m ²
Linear coverage per row	9.75 lin. ft	2.97 lin. m

Unit dimensions	in	mm	Units /pallet
A	Height 3 1/8 Width 13 Length 6 1/2	80 330 165	32 units

B	Height 3 1/8 Width 13 Length 13	80 330 330	32 units
---	---------------------------------------	------------------	----------

C	Height 3 1/8 Width 13 Length 19 1/2	80 330 495	16 units
---	---	------------------	----------

01 | Modular pattern 02 | Modular pattern 03 | Linear pattern

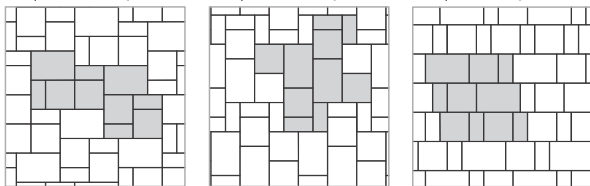

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.



