

TRAVERCORE™

PAVERS



TRAVERCORE™

INTERIOR AND EXTERIOR PAVERS

LOW MAINTENANCE.
EASY TO CLEAN.
NO FADING. NO WORRIES.

WHY TRAVERCORE?

Easy to clean and looks just like Travertine.
Use Travercore as a great alternative!

IDEAL FOR

PATIOS

POOL DECKS

STAIRS & STEPS

WALKWAYS

ADVANTAGES



EASY TO CLEAN,
STAIN RESISTANT




EASY INSTALL



SUPPORTS
OVER 2000LB



FIRE RESISTANT
AND DURABLE



REMOVABLE
AND REUSABLE



LIGHT AND
EASY TO HANDLE



RESISTANT TO EXTREME
TEMPERATURES
(-40°F - 210°F)



THERMAL INSULATION
(HOT AND COLD)




SLIP RESISTANT,
QUICK DRAINING



SILVER
Running Bond Pattern
24" x 48" (23½ x 47¼")



SEA SHELL
24" x 24" (23½ x 23½")
12" x 24" (11¾ x 23½")
12" x 12" (11¾ x 11¾")

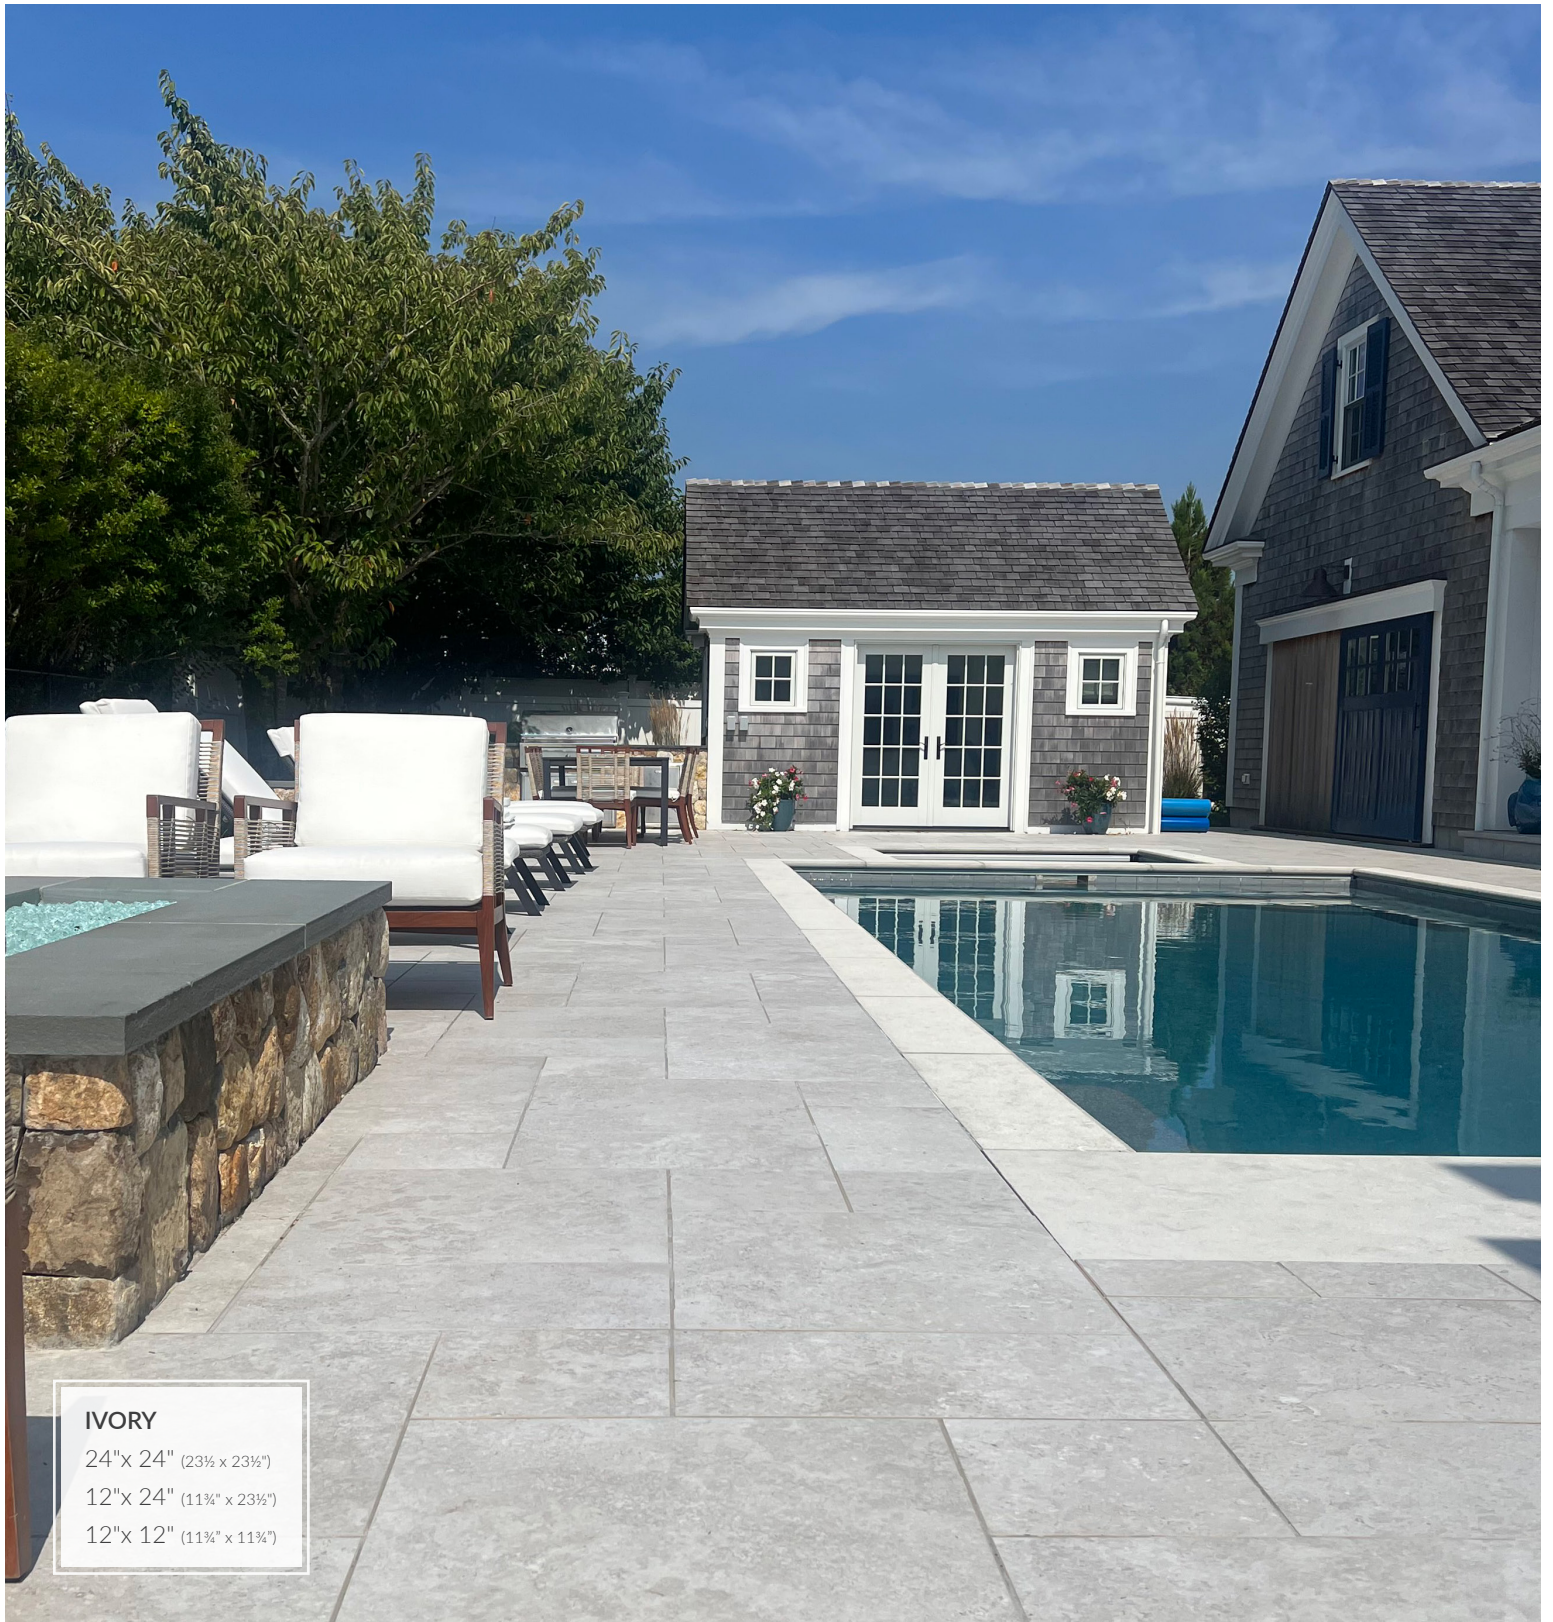

IVORY

24" x 24" (23½" x 23½")

12" x 24" (11¼" x 23½")

12" x 12" (11¼" x 11¼")

AVAILABLE SIZES
Silver, Ivory Pearl, Seashell



12" x 12" (11¼" x 11¼")



12" x 24" (11¼" x 23½")



24" x 24" (23½" x 23½")



24" x 48" (23½" x 47½")



MOCHA

24" x 24" (23½" x 23½")

12" x 24" (11¾" x 23½")

12" x 12" (11¾" x 11¾")

AVAILABLE SIZES

Mocha, Walnut



12" x 12" (11¾" x 11¾")



12" x 24" (11¾" x 23½")




24" x 24" (23½" x 23½")

Special Pieces


DOUBLE BEVEL COPING

12" x 24" (11³/₄" x 23¹/₂")

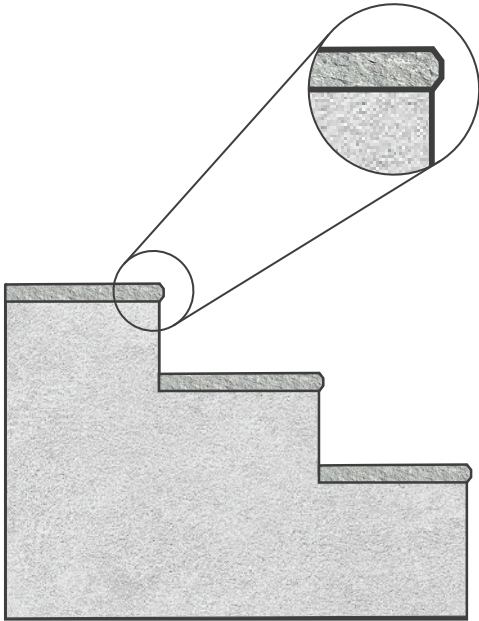


MITERED COPING

12" x 24" (11³/₄" x 23¹/₂")

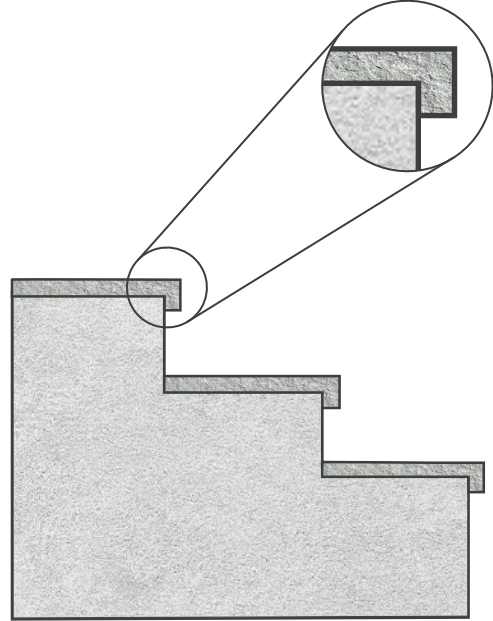

BULLNOSE COPING


12" x 24" (11³/₄" x 23¹/₂")

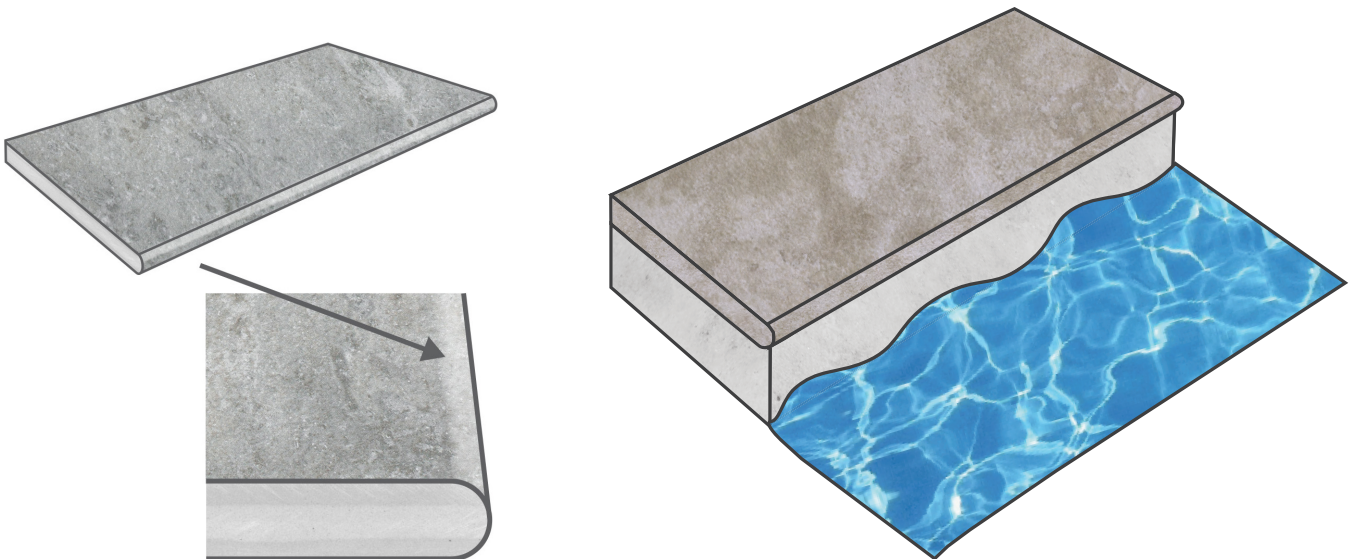



SILVER
Running Bond Pattern
 24" x 48" (23½ x 47½")

POPULAR PATTERNS




PATTERN A

1 pcs	24"x24"	57.2%
1 pcs	12"x24"	28.5%
1 pcs	12"x12"	14.3%



PATTERN B

1 pcs	24"x24"	40%
2 pcs	12"x24"	40%
2 pcs	12"x12"	20%



PATTERN C

2 pcs	24"x24"	44.5%
3 pcs	12"x24"	33.3%
4 pcs	12"x12"	22.2%

Comparison to Travertine

TRAVERCORE™ Pavers	VS.	Natural Travertine
Specification	Travercore™ Pavers	Natural Travertine
Water Absorption	<0.05%	<5%/10% depending on color
Stain Resistance	High	Low
UV Resistance	Will not fade	Low
Scratch Resistance	High	Low
De-icing Salt Resistance	High	Low
Swimming Pool Salt/Acid Resistance	High	Low
Freeze Thaw Resistance	Freeze thaw proof	Low
Slip Resistance	High	Low
Sealing	Never	Recommended
Compressive Strength	> 28,000 PSI	7,000/12,000 PSI depending on color
Weight lbs/sf	9	15 / 50 depending on color

Additional specs are located in the installation guide

Mocha



Silver



Ivory Pearl



Seashell



Walnut

